


Highlights

- Full band coverage.
- Lower return loss and stable performance.
- PIM less than -150dBc @ 20w.
- Compact design, light weight and easy installation.
- Lifetime warranty.

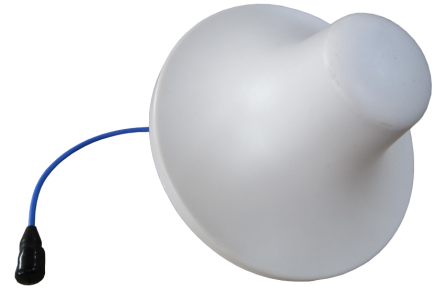

ELECTRICAL SPECIFICATIONS

Models	ID727V25-B20			
Frequency	698-960MHz		1710-2700MHz	
Intermodulation	≤-150dBc (IMD3 with 2×20W)			
Gain	2dBi		4dBi	
Polarization	Vertical			
VSWR	≤1.8		≤1.5	
Beamwidth	H:360°	E:60°	H:360°	E:35°
Impedance	50Ω			
Power Handling	50w			
Lighting Protection	DC Ground			

MECHANICAL SPECIFICATIONS

Color	White
Operating Temperature	-40°C to +55°C -40°F to +131°F
Connectors	N-Female
Reflector Material	Copper
Radome Material	ABS
Weight	0.4Kg 0.882lb
Dimensions	Ø203*98mm 8.0*3.86in

Radiation Pattern

