

Highlights

- Full band coverage
- Lower return loss and stable performance
- Compact design, light weight and easy installation
- Lifetime warranty




ELECTRICAL SPECIFICATIONS

Models	IP727V78			
Frequency	698-806MHz	806-960MHz	1710-2500MHz	2500-2700MHz
Gain	7dBi		8dBi	
Polarization	Vertical			
VSWR	≤1.8	≤1.5	≤1.5	≤1.8
Beamwidth	H:70°	E:55°		
F/B Ratio	≥15dB			
Impedance	50Ω			
Power Handling	50w			
Lighting Protection	DC Ground			

MECHANICAL SPECIFICATIONS

Color	White
Operating Temperature	-40°C to +70°C -40°F to +158°F
Connectors	N-Female
Reflector Material	Aluminum
Radome Material	ABS
Weight	0.6Kg 1.32lb
Dimensions	210*180*43mm 8.27*7.09*1.69in

Radiation Pattern

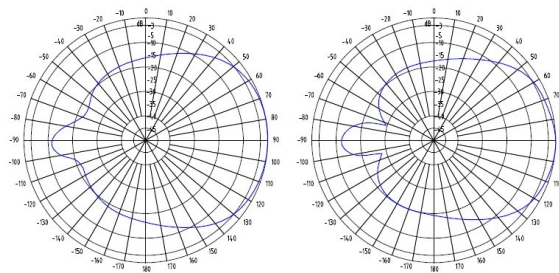

Horizontal

Vertical