


Specifications




Models	LSNM-10003 (Indoor)	LSNM-10003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	100w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	1.2Kg 2.64lb	
Dimensions	120*100*60mm 4.72*3.94*2.36in	

Outline Drawing

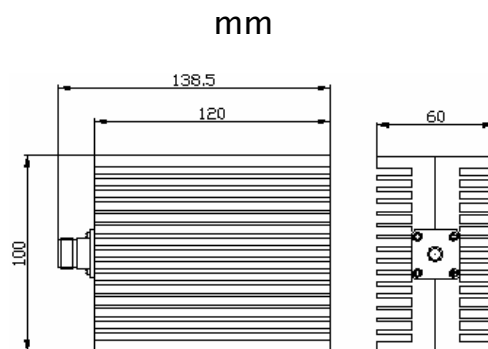


Specifications



Models	LSNM-10003-15A (Indoor)	LSNM-10003P-15A (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	100w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-150dBc (IMD3 @ 2×43dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	1.2Kg 2.64lb	
Dimensions	140*120*125mm 5.51*4.72*4.92in	

Outline Drawing

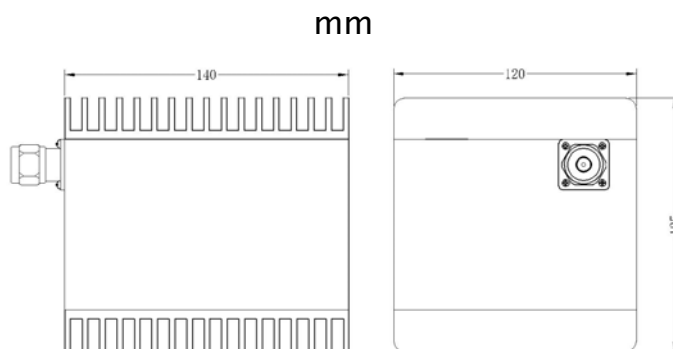


Specifications



Models	LSNM-10004 (Indoor)	LSNM-10004P (Outdoor IP65)
Frequency	0-4GHz	
Power Capacity	100w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	1.3Kg 2.86lb	
Dimensions	120*100*60mm 4.72*3.94*2.36in	

Outline Drawing

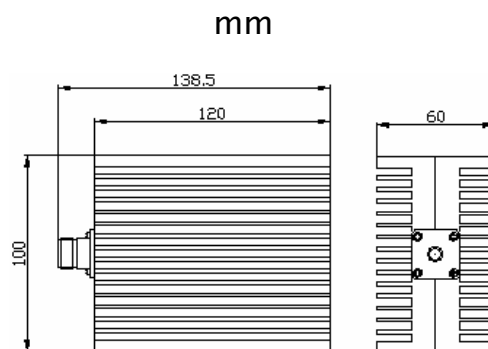


Specifications



Models	LSNM-10006 (Indoor)	LSNM-10006P (Outdoor IP65)
Frequency	0-6GHz	
Power Capacity	100w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	1.3Kg 2.86lb	
Dimensions	120*100*60mm 4.72*3.94*2.36in	

Outline Drawing

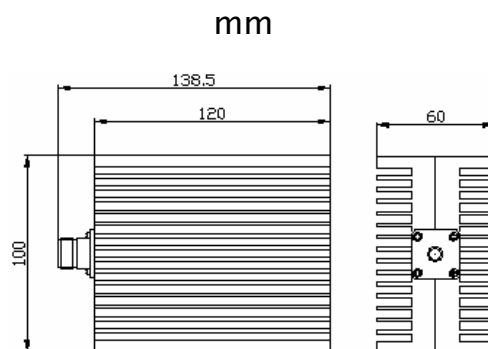


Specifications



Models	LSDM-10003 (Indoor)	LSDM-10003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	100w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-40°C to +85°C -40°F to +185°F	
Weight	0.943Kg 2.07lb	
Dimensions	100*85*60mm 3.94*3.35*2.36in	

Outline Drawing

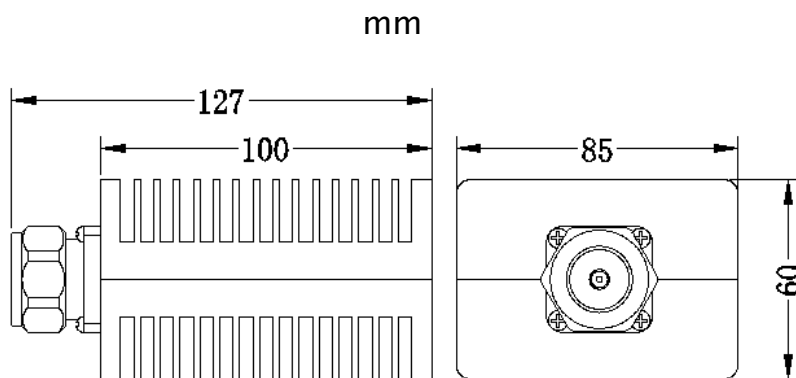


Specifications




Models	LSDM-10003-11A (Indoor)	LSDM-10003P-11A (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	100w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-110dBc (IMD3 @ 2×43dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-40°C to +85°C -40°F to +185°F	
Weight	1.9Kg 4.18lb	
Dimensions	142*120*65mm 5.59*4.72*2.56in	

Outline Drawing

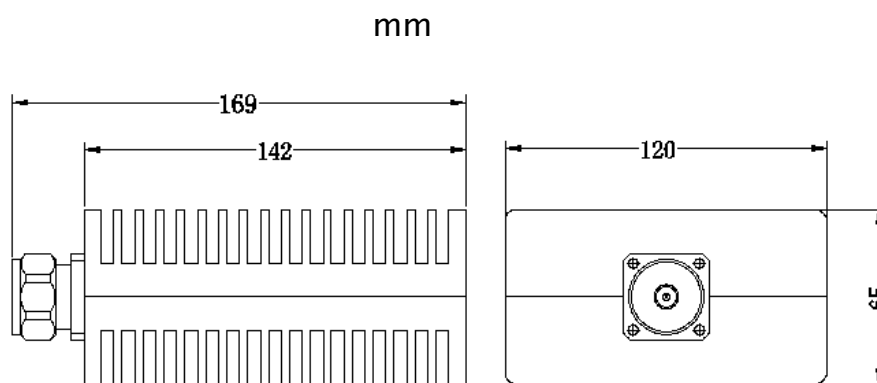

Specifications



Models	LSDM-10003-15A (Indoor)	LSDM-10003P-15A (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	100w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-150dBc (IMD3 @ 2×43dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	1.9Kg 4.18lb	
Dimensions	140*120*125mm 5.51*4.72*4.92in	

Outline Drawing

mm

