




Specifications

Models	LSNM-20003 (Indoor)	LSNM-20003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	200w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	2.23Kg 4.91lb	
Dimensions	200*142*65mm 7.87*5.59*2.56in	

Outline Drawing

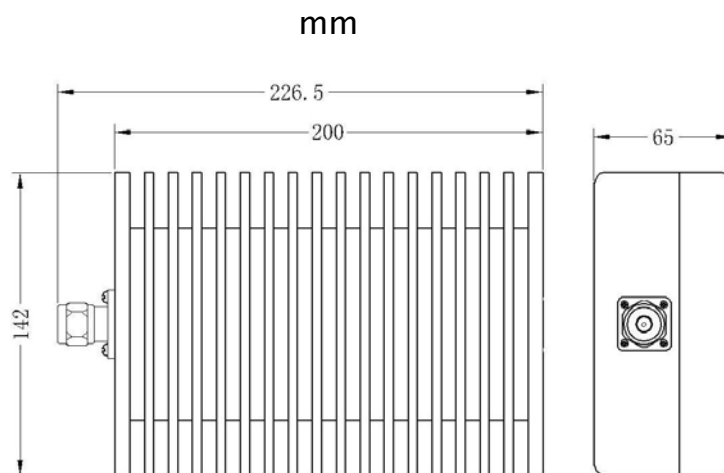


Specifications



Models	LSNM-20003-12A (Indoor)	LSNM-20003P-12A (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	200w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-120dBc (IMD3 @ 2×43dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	2.23Kg 4.91lb	
Dimensions	200*142*65mm 7.87*5.59*2.56in	

Outline Drawing

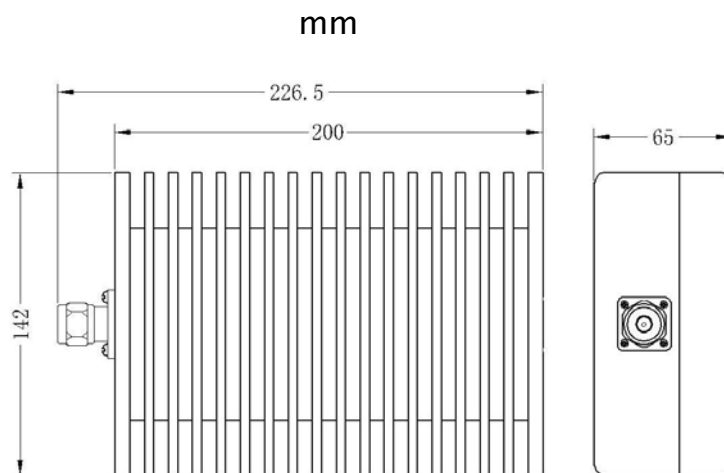


Specifications



Models	LSDM-20003 (Indoor)	LSDM-20003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	200w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	3.4Kg 7.5lb	
Dimensions	230*160*87mm 9.04*6.3*3.42in	

Outline Drawing

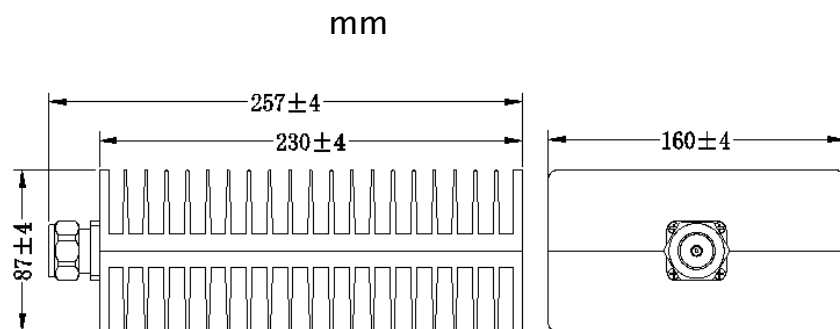

Specifications



Models	LSDM-20003-105A (Indoor)	LSDM-20003P-105A(Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	200w	
VSWR	≤1.15	
Impedance	50Ω	
Intermodulation	-105dBc (IMD3 @ 2×43dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	3.2Kg 7.05lb	
Dimensions	200*142*65mm 7.87*5.59*2.56in	

Outline Drawing

