


## Specifications



Models	LRNM-2503 (Indoor)	LRNM-2503P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	25w	
VSWR	≤1.15	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C   -67°F to +257°F	
Weight	0.21Kg   0.463lb	
Dimensions	∅ 45*90mm   ∅ 1.77*3.54in	

## Outline Drawing

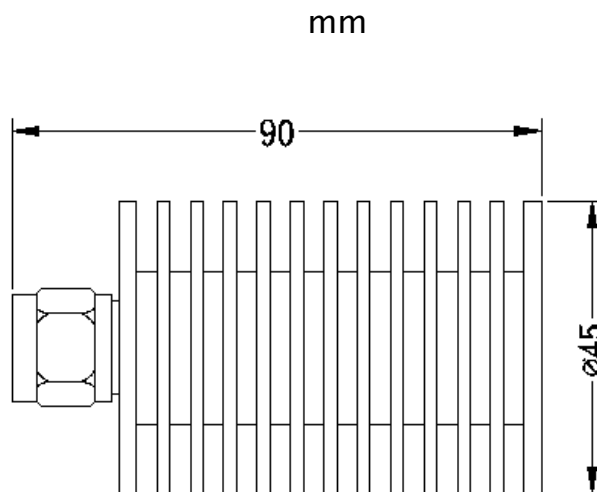


## Specifications



Models	LRNM-2504-11B (Indoor)	LRNM-2504P-11B (Outdoor IP65)
Frequency	0-4GHz	
Power Capacity	25w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-110dBc (IMD3 @ 2×33dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C   -67°F to +257°F	
Weight	0.21Kg   0.463lb	
Dimensions	∅ 45*90mm   ∅ 1.77*3.54in	

## Outline Drawing

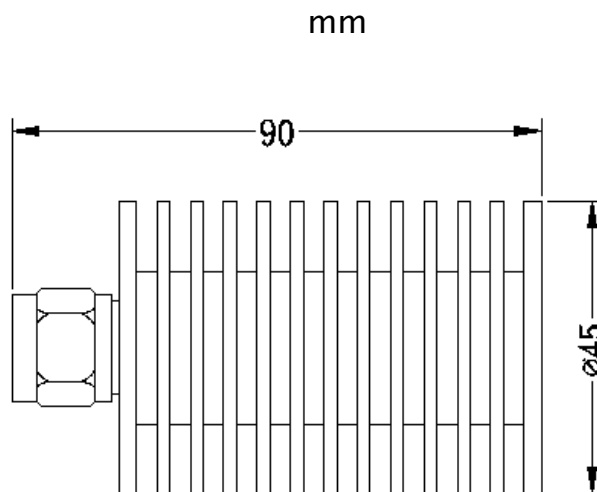


## Specifications



Models	LRNM-2503-12B (Indoor)	LRNM-2503P-12B (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	25w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-120dBc (IMD3 @ 2×33dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C   -67°F to +257°F	
Weight	0.21Kg   0.463lb	
Dimensions	∅ 45*90mm   ∅ 1.77*3.54in	

## Outline Drawing

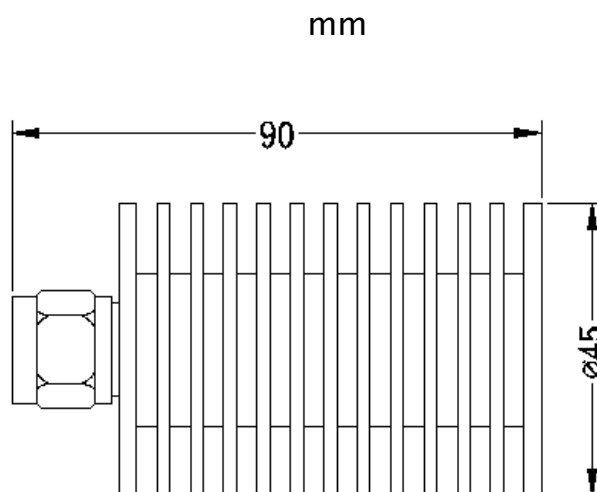

## Specifications



Models	LRDM-2503 (Indoor)	LRDM-2503P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	25w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C   -67°F to +257°F	
Weight	0.25Kg   0.55lb	
Dimensions	∅ 45*90mm   ∅ 1.77*3.54in	

## Outline Drawing

