


Specifications



Models	LSNM-30003 (Indoor)	LSNM-30003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	300w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	3.4Kg 7.5lb	
Dimensions	230*160*87mm 9.05*6.3*3.42in	

Outline Drawing

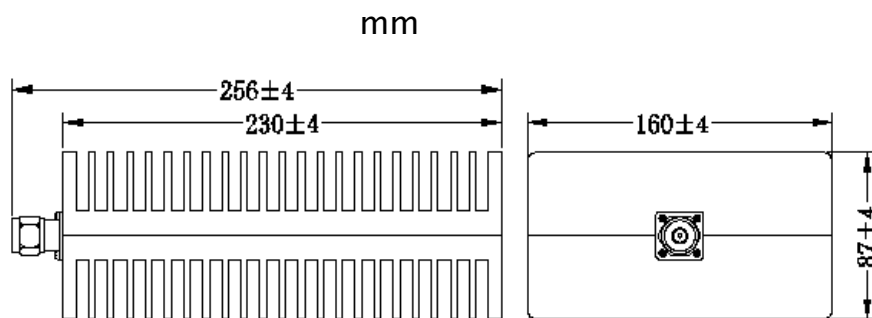


Specifications



Models	LSNM-30006 (Indoor)	LSNM-30006P (Outdoor IP65)
Frequency	0-6GHz	
Power Capacity	300w	
VSWR	≤1.35	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	3.4Kg 7.5lb	
Dimensions	230*160*87mm 9.05*6.3*3.42in	

Outline Drawing

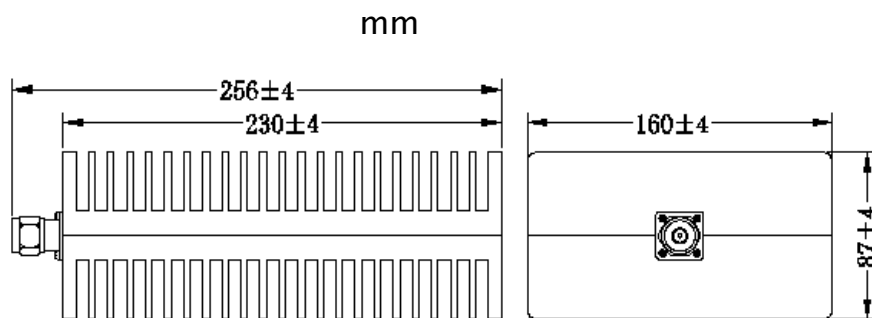


Specifications



Models	LSDM-30003 (Indoor)	LSDM-30003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	300w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	3.4Kg 7.5lb	
Dimensions	230*160*87mm 9.04*6.3*3.42in	

Outline Drawing

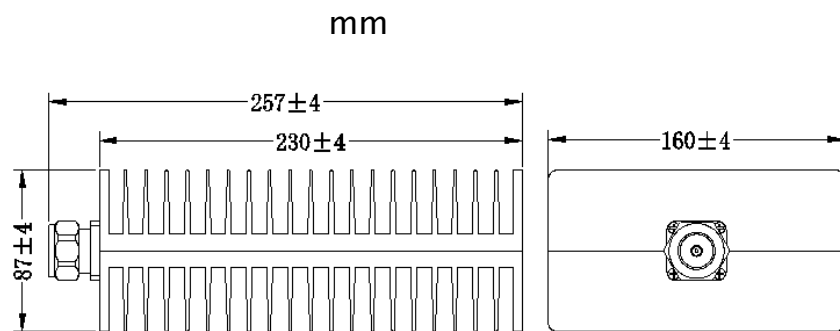


Specifications




Models	LSDM-30003-12A (Indoor)	LSDM-30003P-12A (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	300w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-120dBc (IMD3 @ 2×43dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	3.4Kg 7.5lb	
Dimensions	230*160*87mm 9.04*6.3*3.42in	

Outline Drawing

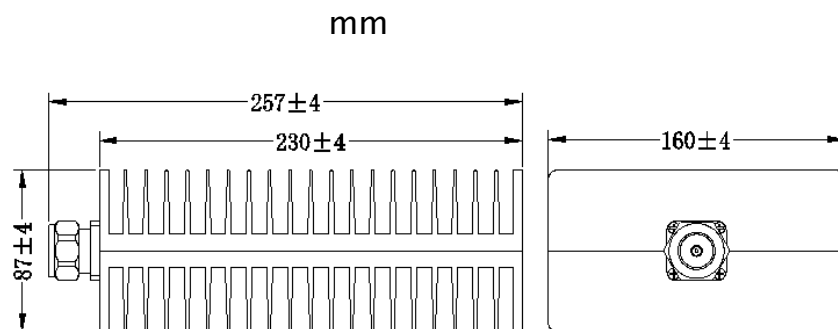

Specifications



Models	LSDM-30003-15A (Indoor)	LSDM-30003P-15A (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	300w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	-150dBc (IMD3 @ 2×43dBm)	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	3.9Kg 8.37lb	
Dimensions	182*140*125mm 7.16*5.51*4.92in	

Outline Drawing

mm

