


Specifications



Models	LRNM-3003 (Indoor)	LRNM-3003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	25w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	N-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	0.21Kg 0.463lb	
Dimensions	∅ 45*90mm ∅ 1.77*3.54in	

Outline Drawing

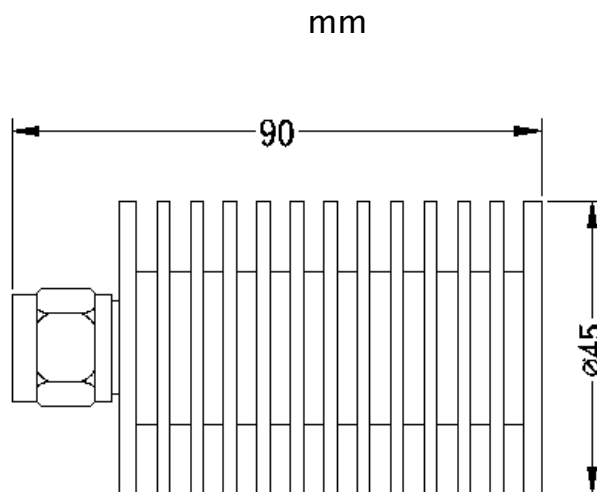

Specifications



Models	LRDM-3003 (Indoor)	LRDM-3003P (Outdoor IP65)
Frequency	0-3GHz	
Power Capacity	30w	
VSWR	≤1.2	
Impedance	50Ω	
Intermodulation	NA	
Application	Indoor	Outdoor (IP65)
Connectors	DIN-Male	
Operating Temperature	-55°C to +125°C -67°F to +257°F	
Weight	0.25Kg 0.55lb	
Dimensions	∅ 45*90mm ∅ 1.77*3.54in	

Outline Drawing

